




Connect 3™

Discover your new smart apartment.



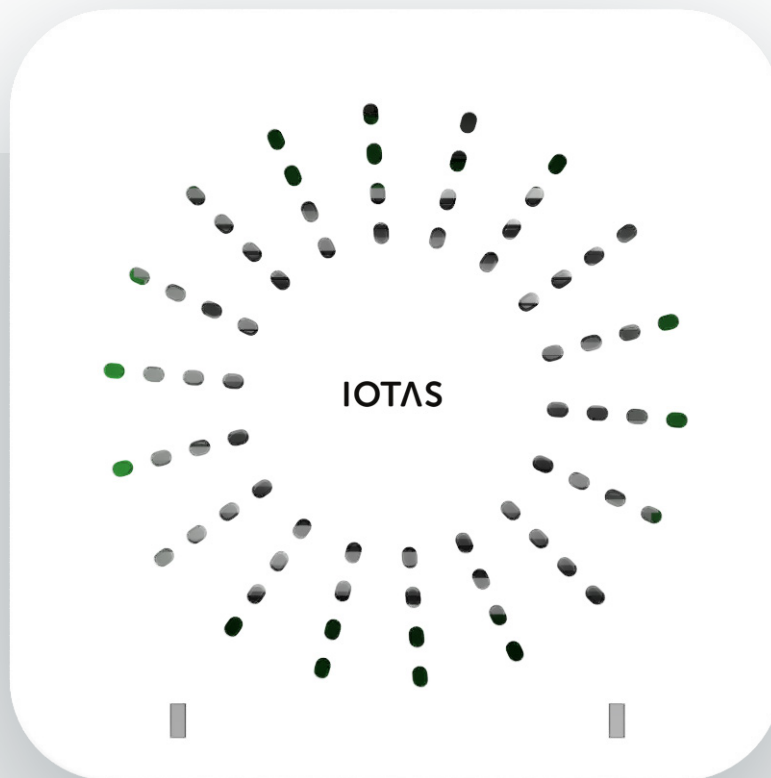

IOTAS Platform

Connect Your Community

IOTAS Connect 3™ integrates with lights, outlets, thermostats, door locks, and more.

The system allows residents remote access to their home but also delivers powerful solutions to property management for building-wide control and oversight.



**Resident
App**



**Property
Dashboard**



**Connect Pro
App**



**10+ Device
Categories**



**Scenes and
Automation**



**Powerful
Integrations**



Features

Immersive Building Experience


Resident App

- Zero Setup
- Control Anytime, Anywhere
- Home Scenes
- Automated Routines
- Community Access
- Guest Access
- Voice Control
- Peace of Mind Alerts



Property Dashboard


- Automatic Resident Management
- Preventative Property Alerts
- Vacant Unit Automation
- Common Area Automation
- Resident Access Automation
- Maintenance Access
- Self-Guided Tours
- Property Insights

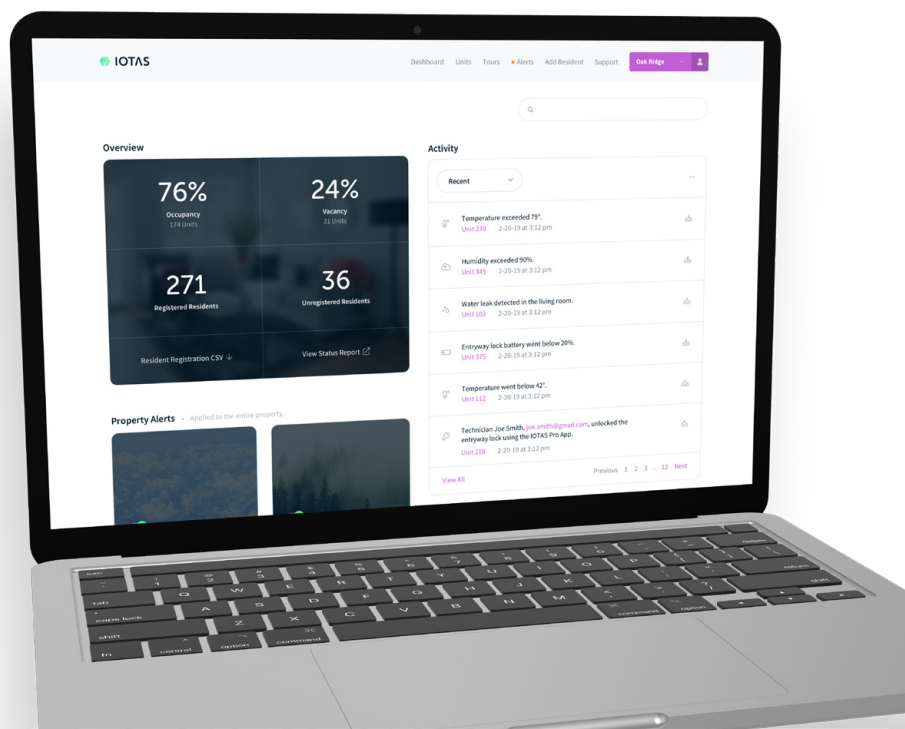

Get Started

Plug and Play

No complicated setup instructions,
installation done in seconds. Simply plug
in the ethernet and power cord.

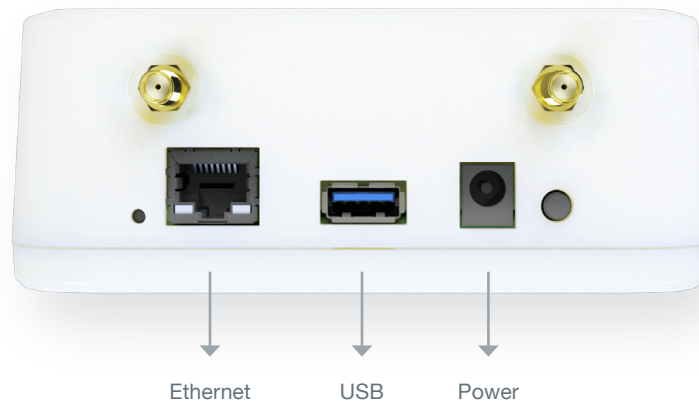




Easy Setup

Plug and Play


1. Set up your home internet connection with your preferred provider.
2. Plug the IOTAS hub into a power outlet.
3. Plug the IOTAS hub into your internet router.

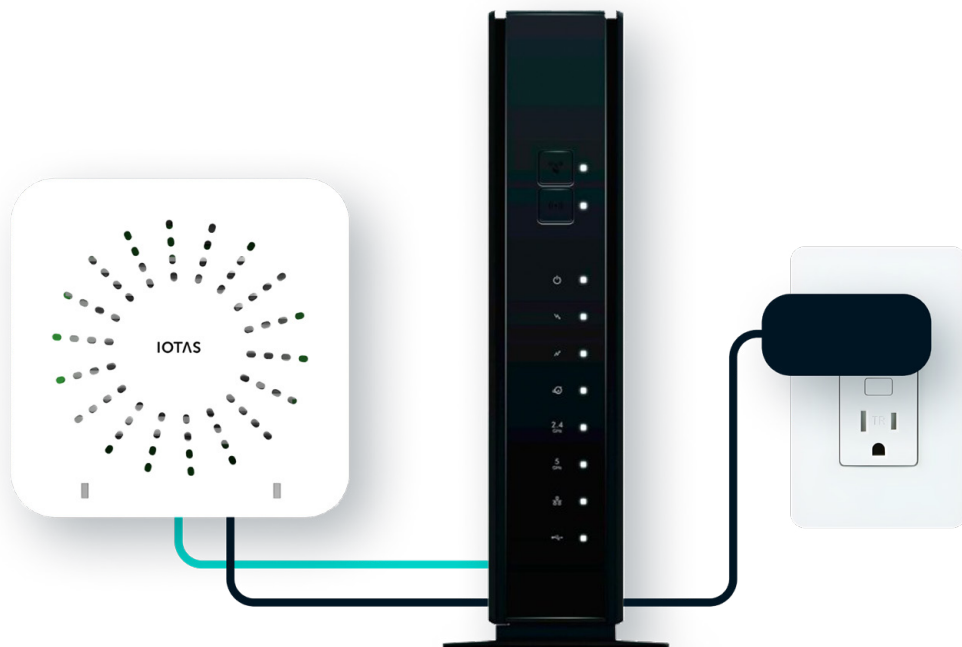



Specifications

Non-Cellular Model

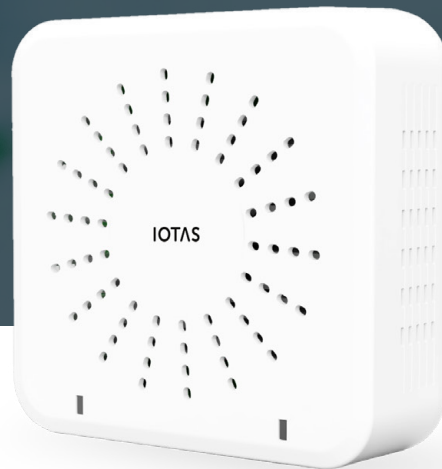

Manufacturer
IOTAS

Warranty
2 Years

CPU
Intel N2807 2.16GHz

Memory
2GB DDR3L 1600

Storage
16GB

Security
TPM Infineon SLB9665TT 2.0

Power Supply
5V DC, 3A

USB Port
1 USB 3.0 Port

Ports
Ethernet (Cat6)

Z-Wave
Silicon LAB ZGM130S037HGN1R 1T1R

Zigbee
Silicon LAB EFR32MG1B232F256GM32-C0 1T1R

Bluetooth
Bluetooth Core Specification Version 4.2

Wi-Fi
IEEE 802.11 a/b/g/n/ac (Dual Band)

What's Included

IOTAS Connect 3 Hub
51 Inch Power Cord
36 Inch Ethernet Cord



Dimensions

4.72 x 4.72 x 1.98 Inches

This product is intended to be supplied by an UL Listed External Adapter marked "Limited Power Source", "LPS" or "PS2" and rated 5 Vdc, minimum 3 A, minimum ambient temperature (Tma) 50°C.

CAUTION: Risk of explosion if battery is replaced by an incorrect type dispose of used batteries according to the instructions.

ATTENTION : Risque d'explosion si la batterie est remplacée par un type incorrect. Jetez les batteries usagées conformément aux instructions.



Specifications

Cellular Model

**Manufacturer**

IOTAS

Warranty

2 Years

CPU

Intel N2807 2.16GHz

Memory

2GB DDR3L 1600

Storage

16GB

Security

TPM Infineon SLB9665TT 2.0

Power Supply

5V DC, 3A

USB Port

1 USB 3.0 Port

Ports

Ethernet (Cat6)

4G LTE

Quectel EC25-AFX

Z-Wave

Silicon LAB ZGM130S037HGN1R 1T1R

Zigbee

Silicon LAB EFR32MG1B232F256GM32-C0 1T1R

Bluetooth

Bluetooth Core Specification Version 4.2

Wi-Fi

IEEE 802.11 a/b/g/n/ac (Dual Band)

What's Included

IOTAS Connect 3 Hub
51 Inch Power Cord
36 Inch Ethernet Cord
2 Antennas

**Antennas ↑**

6.22 x 4.72 x 6.48 Inches

**Antennas →**

10.22 x 4.72 x 1.98 Inches

**Hub Only**

4.72 x 4.72 x 1.98 Inches

This product is intended to be supplied by an UL Listed External Adapter marked "Limited Power Source", "LPS" or "PS2" and rated 5 Vdc, minimum 3 A, minimum ambient temperature (Tma) 50°C.

CAUTION: Risk of explosion if battery is replaced by an incorrect type dispose of used batteries according to the instructions.

ATTENTION : Risque d'explosion si la batterie est remplacée par un type incorrect. Jetez les batteries usagées conformément aux instructions.